
WHEELCHAIR RAMPS SHALL BE CONSTRUCTED IN CONFORMANCE WITH THE CURRENT REGULATIONS OF THE ARCHITECTURAL ACCESS BOARD, THE AMERICANS WITH DISABILITIES ACT AND THE CURRENT MASSHIGHWAY CONSTRUCTION STANDARDS.

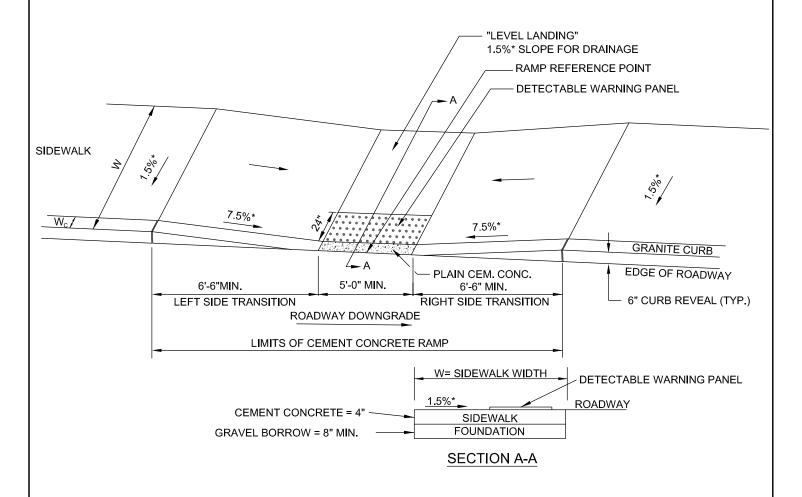

## WHEELCHAIR RAMP TYPE A

NOT TO SCALE

## LEGEND:

HSL = HIGH SIDE TRANSITION LENGTH

W = SIDEWALK WIDTH

 $W_c$  = CURB WIDTH

\* = TOLERANCE FOR CONSTRUCTION ±0.5%

USABLE SIDEWALK WIDTH PER AAB = W-W<sub>c</sub>

USABLE SIDEWALK WIDTH PER AAB IS NOT TO BE LESS THAN 4'-0"

SEE M/E 107.6.5R FOR DETAILS OF DETECTABLE WARNING PANEL



DAT	E:
FEB. 2	010

DETAIL NO.

REV:

R-5.3.1